



# Installation

## 24-Port Gigabit Ethernet Unmanaged Switch GS324

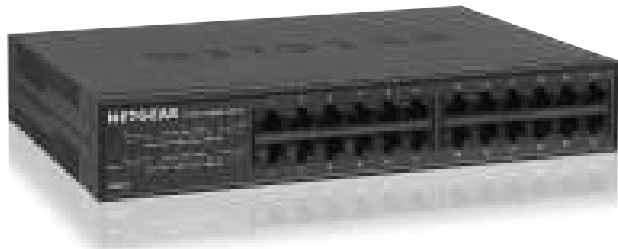


### Step 1. Connect the equipment.

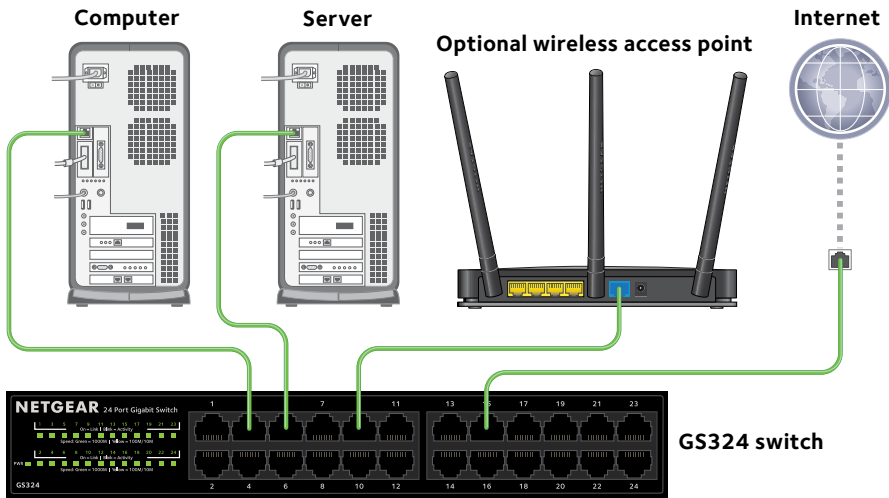






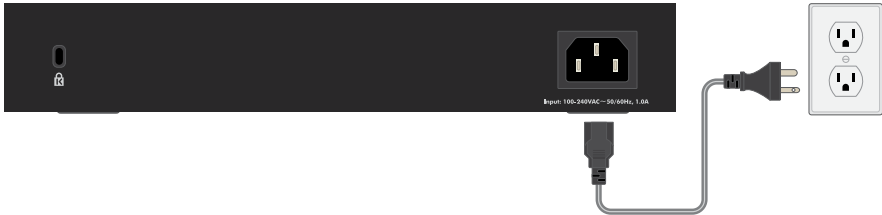


NETGEAR®
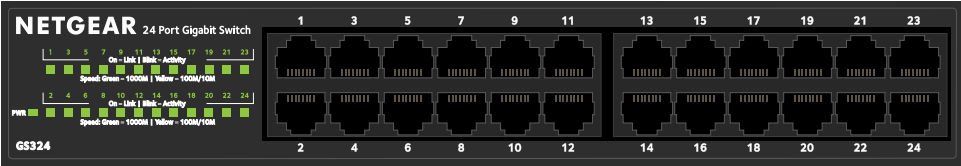
### Step 2. Connect to power.



### Step 3. Check the status.



Power LED	Port Number LEDs (Link/Activity)	Port Speed LEDs
 On	 Link	 1000 Mbps
 Off	 Activity (blinking)	 100/10 Mbps.
	 No link (off)	

# Specifications

Specification	Description
Network interface	RJ-45 connector for 10BASE-T, 100BASE-TX, or 1000BASE-T
Network cable	Category 5 (Cat 5) or better Ethernet cable
Ports	24
Power	100–240VAC 50/60 Hz, 1.0A
Power consumption	11.1W max.
Weight	1.31 kg (2.90 lb.)
Dimensions (W x D x H)	252 x 180 x 44 mm 9.92 x 7.09 x 1.73 in
Operating temperature	0–40°C (32–104°F)
Operating humidity	10%–90% relative humidity, noncondensing

# Support

Thank you for purchasing this NETGEAR product. You can visit [www.netgear.com/support](http://www.netgear.com/support) to register your product, get help, access the latest downloads and user manuals, and join our community. We recommend that you use only official NETGEAR support resources.

For the current EU Declaration of Conformity, visit [http://support.netgear.com/app/answers/detail/a\\_id/11621/](http://support.netgear.com/app/answers/detail/a_id/11621/).

For regulatory compliance information, visit <http://www.netgear.com/about/regulatory/>.

See the regulatory compliance document before connecting the power supply.

