


SANITIZABLE COMPACT HYGIENE KEYBOARD WITH NUMPAD

AK-C7000 SERIES MEDICAL KEY

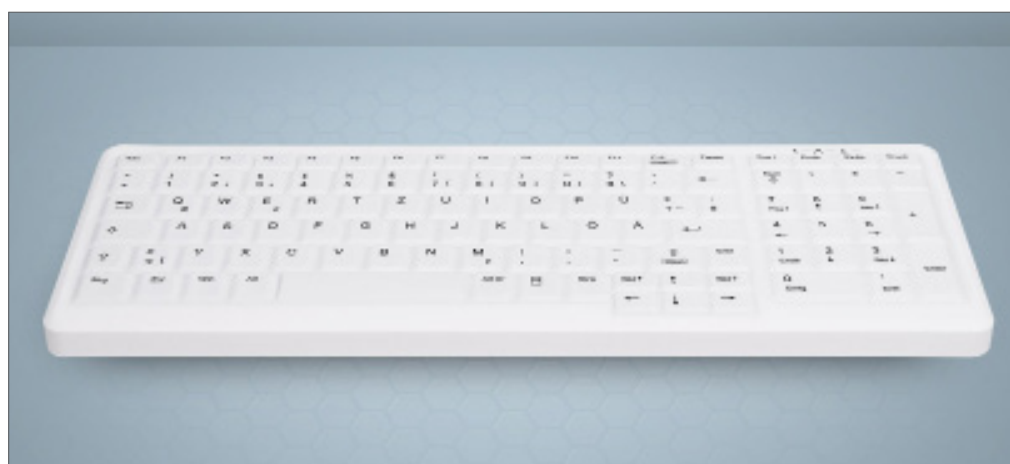

FEATURES & BENEFITS

- + Hygiene Keyboard for Clinical Wipe Disinfection
- + Clinical Wipe Disinfection with all common Disinfectants according to German Guidelines VAH/DGHM
- + Utmost Writing Comfort by Scissors Balancing Technology
- + Perfect Type Writing in Hygiene Critical Applications
- + Exchangeable Membrane for Machine Reprocessing: Maschine Reprocessing at 93°C and 134°C (in Addition to Wipe Disinfection) or optional:
 - Wireless: Fully Sealed Membrane for Protection Class IP68
 - Cabled: Fully Sealed IP68
 - Backlit: Fully Sealed IP68
- + Clean-Function allows to switch off Keys during Cleaning Process

TECHNICAL DATA



Compatibility	x	x	x	All systems, supporting a standard USB
Temperature Range	x	x	x	Storage -20° to +60°C; Operation 0° to +50°C
Silicon Keyboard Cover	x	x	x	Exchangeable Silicone Membrane (Standard) or Fully Sealed IP68 (Option)
Interface		x	x	USB 1.1
Supply Voltage	x			6 V via 4 AAA-Batteries
		x	x	5 V +5%/-10% through USB Port
Current Consumption	x			10 mA (USB Low Power Device) / USB Type A (USB Nano-Dongle), Effective Range appr. 10m (2,4 GHz RF)
		x	x	Backlit: Max. 169mA; Non-Backlit: Max. 25mA (USB Low-Power-Device)
Dimensions		x	x	Appr. 374 x 139 x 25mm
	x			Appr. 372 x 137 x 37mm
Weight	x	x	x	730g
Dimming Backlight			x	8 levels, intensity controlled by „FN“ + Cursor „UP“ and „Down“ keys
LED Status Indicators	x	x	x	Caps Lock, Num Lock, Scroll Lock, CleanFunction
Key Travel / Actuation Force	x	x	x	Ca. 2,5 +/- 0,5 mm / ca. 60g - similar to Notebook-Keyboards
Cable Length		x	x	Appr. 1.80m
Agency Approvals	x	x		CE, RoHS, FCC Test-Report, EN-60601-1-2:2015 (IEC 4th Edition)*

*No Medical Device acc.to MDR 2017/745 EU

PART NO. / ORDER NO.

Example: Keyboard AK-C7000 cabled, USB, White, German	AK-C7000F-U1	-	W	-	GE
Cabled, USB Interface, wipe disinfection, standard	AK-C7000F-U1	-	y	-	x
Cabled, USB-Interface, fully sealed, IP68	AK-C7000F-UVS	-	y	-	x
Wireless interface, wipe disinfection, standard	AK-C7000F-FU1	-	y	-	x
Wireless Interface, fully sealed, IP68 with closed battery compartment	AK-C7000F-FUS	-	y	-	x
Backlit, cabled, USB Interface, wipe disinfection standard	AK-CB7000F-U1	-	y	-	x
Backlit, cabled, USB Interface, fully sealed IP68	AK-CB7000F-US	-	y	-	x
Exchangeable Membrane	AK-C7000	-	y	-	x
Exchangeable Membrane, Backlit	AK-CB7000	-	y	-	x
Identifier z Version/Option	Identifier y Color	Identifier x Country Version			
Version: Cabled U1 = USB-Connector, wipe disinfection (Standard Version) UVS = Fully Sealed, Protection Class IP68, USB US = Fully Sealed, Protection Class IP68, USB, Backlit	W = White (Standard Version) B = Black	GE = German FR = French UK = UK English All other European country layouts are available at Active Key			
Version: Wireless FU1 = Wireless, wipe disinfection (Standard Version) FUS = Wireless, fully sealed, Protection Class IP68 with closed battery compartment, USB Nano-Dongle					