



GEP-2651 Version: 1

TURING 26-Port Web Smart Gigabit PoE Switch, 24 PoE Outputs, 2 x SFP/RJ45 Combo, 185W, 802.3at/af PoE

GEP-2651 Web Smart Gigabit PoE Switch is a next-generation Ethernet Switch offering powerful L2 features, Layer 3 Static Route, better PoE functionality and usability that delivers the cost-effectively business and transports Ethernet services via fiber or copper connections. GEP-2651 delivers 24 (10M/100M/1G) RJ45/PoE+ (Support 802.3at/af, and total up to 185W) ports and 2 Combo GbE RJ45/SFP ports. GEP-2651 provides high HW performance and environment flexibility for SMBs and Enterprises. GEP-2651 is ideal to deliver management simplicity, optimum user experience, and lower total cost of ownership. The embedded Device Managed System is designed to be extremely easy-to-use/manage/install IP Phone, IP Cam, or Wifi-AP for Enterprise Applications.

Key Features

- 24 Gigabit PoE ports and 2 Gigabit RJ45/SFP combo ports
- QoS control for traffic prioritization and bandwidth management
- DHCP Client/Server
- Supports IPv4/IPv6 network operation
- Minimize carbon footprint with advanced energy efficient technology (IEEE 802.3az)
- IEEE 802.1d/w/s Spanning Tree Protocol (STP) and port mirroring
- IP Multicast Filtering through IGMP Snooping V1 / V2 / V3
- Supports port-based VLAN, IEEE 802.1Q VLAN Tagging
- Total PoE power budget: 185W, up to 30W per port

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
IEEE 802.3z 1000BASE-X, Gigabit Ethernet
IEEE 802.1p Quality of Service (QoS)
IEEE 802.1X Port-based Network Access Control (PNAC)
IEEE 802.1Q Virtual LANs (VLANs)
IEEE 802.1D MAC Bridges
IEEE 802.1d Standard Spanning Tree Protocol
IEEE 802.1s Multiple Spanning Tree (MSTP)
IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
IEEE 802.3ad Link Aggregation Control Protocol (LACP)
IEEE 802.3af Power over Ethernet (PoE)
IEEE 802.3at Power over Ethernet Plus (PoE+)
IEEE 802.3az Energy-Efficient Ethernet
Link Layer Discovery Protocol (LLDP)

**Memory:**

RAM : 128 MB

Flash : 32 MB

Buffer Memory:

512 KB

Port:

24 x 10/100/1000Mbps RJ45 PoE port

2 x Gigabit RJ45/SFP combe port

Button/Knob:

Mode / Reset Button

Indicator:

System, Link/Act/Speed, PoE

Transmission Method:

Store-and-Forward

Power Input:

100-240 VAC 50~60 Hz

Power Consumption:

18.29W (without PoE)

Backplane (Gbps):

Switching Bandwidth: 52Gbps

Forwarding Performance : 38.7Mpps

MAC Address Table:

8K

Data Rate:

10/100/1000Mbps

Features

General:

Device Management System (DMS)

Virtual Local Area Network (VLAN):

802.1Q tag-based VLAN - up to 256 VLANs and 4096 VLAN IDs

Port-based VLAN

MAC-based VLAN

Q-iN-Q (double tag) VLAN

DHCP: DHCP Client

IPv6:

IPv6 host mode; IPv6 stateless address auto-configuration; Duplicate Address Detection (DAD)

ICMP v6;

IGMP:

IGMP v1/v2/v3 snooping; IGMP Queried; IGMP Proxy

IPv6 QoS Prioritize IPv6 packets in hardware

Port Mirroring:

Many-to-One TX/RX

QoS Class of service (CoS)

DiffServ (DSCP)

IEEE802.3x Flow Control

PoE:

Power Budget: Max. 185W

Power Output: Up to 30W per port

Protection: Circuit protection to prevent power interference between ports

Management: PoE status, PoE on/off scheduling, PoE power delay, PoE Auto checking, Per port power priority setting

Pin Assignment: 1/2(+), 3/6(-)

Security:

ACLs: L2/L3/L4
ACLs: IPv6 Support
Port Security (MAC-based)
IP Source Guard
Storm Control
RADIUS Authentication 802.1x
HTTPs and SSL (Secured Web)
BPDU Guard
STP Root Guard
DHCP Snooping
Loop Protection

Management:

Switch Management:
DHCP: Client, Option 66, Option 67
Event/Error Log: Syslog, SMTP(RFC821)
Management Access Filtering: SNMP, Web
PoE Management: Scheduling, Auto-Checking, Power DelaySNMP (v1/v2c/v3)
RMON (1,2,3 & 9 Groups)
Software Upgrade
Configuration Export/Import
Port Mirroring
LLDP (IEEE802.1AB)
LLDP-MED (IEEE802.1AB)
CDP Aware
IPv6 Management
NTP

L3:

DHCP Server
Static Route

Ease of Use:

Firmware and Configuration: Upgrade via HTTP

Performance**Packet Forwarding Rate:**

38.68 Mpps

Jumbo Frame (K):

9.6K

Switching Capacity:

52 Gbps

Environment**Power Saving:**

IEEE 802.3az Energy Efficient Ethernet:

- Automatically turns power off on RJ-45 port when detecting link down or Idle of client
- Cable length detection: Adjusts the signal strength based on the cable length
- Reduces the power consumption for cables shorter

Operating Temperature (°C):

Operating: 0°C ~ 45°C

Storage: -20°C ~ 70°C

Operating Humidity (Non-condensing):

Storage: 10% ~ 90%

Operating: 10 ~ 90%

Installation:
19-inch rack-mountable

Physical Specifications

Dimensions (W x D x H mm):
442 x 211 x 44 mm

Weight (g):
3100g

Reliability


MTBF:
25°C: 211,272(hr)
40°C: 103,032(hr)


Approval and Compliance

EMI/EMS:
CE, FCC Part 15 Class A
ROHS

Safety:
UL 60950-1, 2nd Edition, 2014-10-14 (Information Technology Equipment - Safety - Part 1: General Requirements)
CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10 (Information Technology Equipment - Safety - Part 1: General Requirements)

Diagram

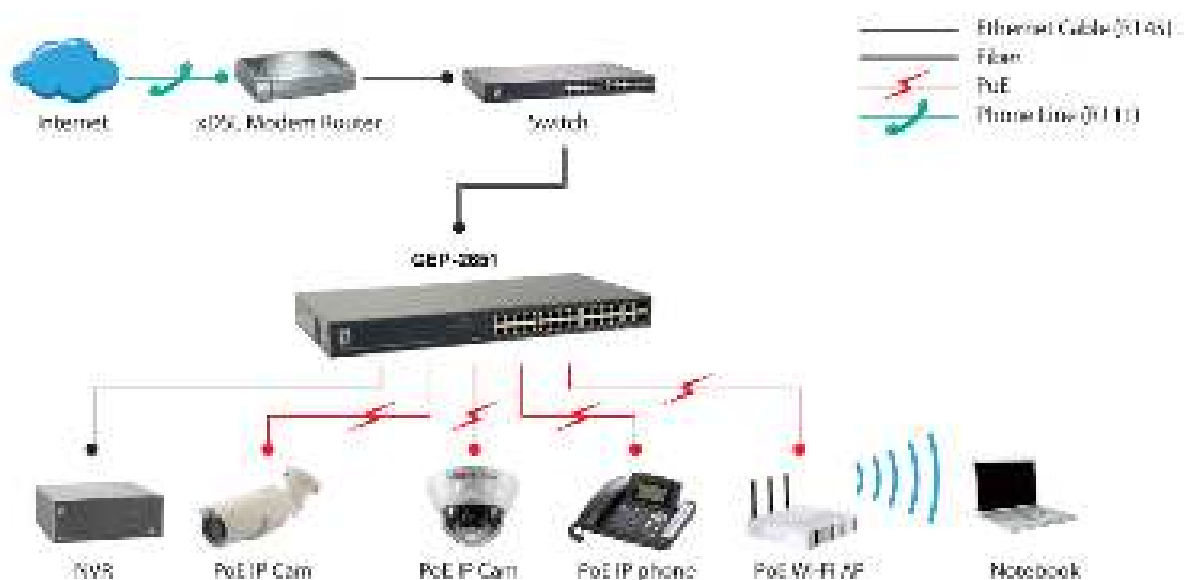

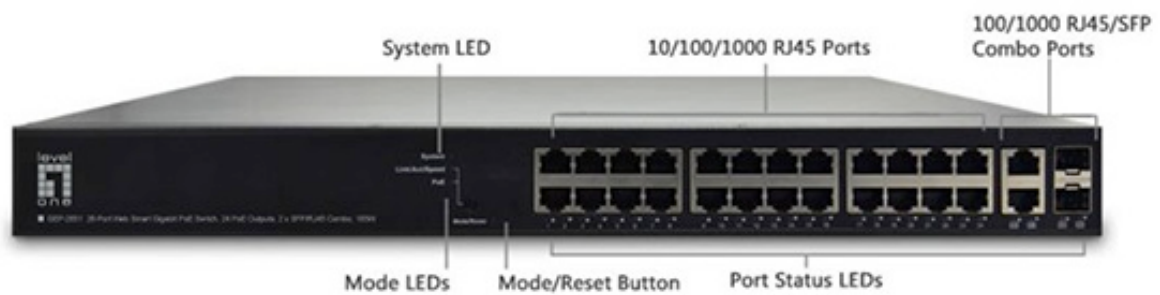

Order Information

GE-P2651

Package Contents

GE-P2651
Resource CD (User Manual, QIG)
Power Cord
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.