



APC Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/ rail kit, Marine



Brand : APC

Product code: SRT5KRMXLIM

Product name : Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/ rail kit, Marine


Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/ rail kit, Marine

APC Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/ rail kit, Marine. UPS topology: Double-conversion (Online), Output power capacity: 5 kVA, Output power: 4500 W. AC outlet types: C13 coupler, C19 coupler, IEC Jumpers, Power plug: Terminal, AC outlets quantity: 12 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery life (max): 5 year(s), Battery recharge time: 1 h. Form factor: Mini Tower, Product colour: Black, Display type: LCD. Compliance certificates: RoHS, Certification: CE, DNV, EAC, RCM, VDE, REACH

Features		Battery	
UPS topology *	Double-conversion (Online)	Battery life (max)	5 year(s)
Output power capacity *	5 kVA	Battery recharge time	1 h
Output power *	4500 W	Hot-swap battery	✓
Waveform *	Pure sine	Automatic battery test	✓
Input operation voltage (min) *	160 V	Design	
Input operation voltage (max) *	275 V	Form factor *	Mini Tower
Input frequency *	45/65 Hz	Product colour *	Black
Output operation voltage (min)	220 V	Display type	LCD
Output operation voltage (max)	230 V	LED indicators	✓
Output frequency	50/60 Hz	International Protection (IP) code	IP20
Surge energy rating	480 J	Operational conditions	
Crest factor	3:1	Operating temperature (T-T)	0 - 40 °C
Emergency Power Off (EPO)	✓	Storage temperature (T-T)	-15 - 45 °C
Output voltage Total Harmonic Distortion (THD)	3%	Operating relative humidity (H-H)	0 - 95%
Noise level	55 dB	Storage relative humidity (H-H)	0 - 95%
Surge protection	✓	Operating altitude	0 - 3000 m
Audible alarm(s)	✓	Non-operating altitude	0 - 15000 m
Temperature voltage compensation	✓	Certificates	
Ports & interfaces		Compliance certificates	RoHS
AC outlet types	C13 coupler, C19 coupler, IEC Jumpers	Certification	CE, DNV, EAC, RCM, VDE, REACH
Power plug	Terminal	Packaging content	
AC outlets quantity	12 AC outlet(s)	Quick installation guide	✓
USB port	✓	Weight & dimensions	
USB 2.0 ports quantity	1	Width	432 mm
Serial interface	✓	Depth	719 mm
Serial interface type	RJ-45	Height	130 mm
Serial ports quantity	1	Weight	54.4 kg
Ethernet LAN (RJ-45) ports	1	Packaging data	
Cabling technology	10/100Base-T	Resource CD	✓
SmartSlot	✓	Warranty card	✓
Battery		Package width	610 mm
Battery technology	Sealed Lead Acid (VRLA)	Package depth	960 mm
Number of batteries supported	1	Package height	330 mm
		Package weight	66.9 kg

Logistics data

Harmonized System (HS) code	85078000
Total carbon footprint (kg of CO2e)	46266.7

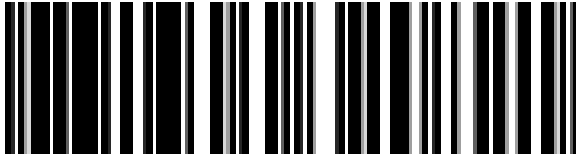

0731304320821



731304320821

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-MAY-2025. Prints or copies of Information are only valid on the printed Publication date