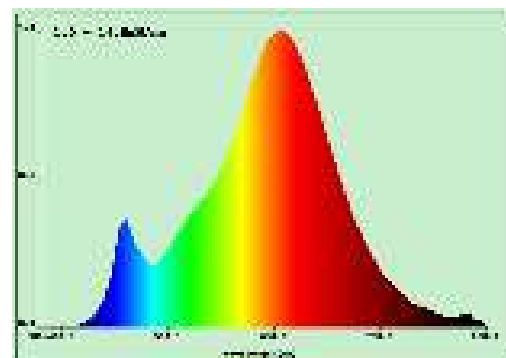


Product Information Sheet			
Supplier's name or trademark:	TP-Link UK Limited		
Supplier's address (a):	Unit 2 & 3 Riverview (142-144), Cardiff Road, Reading, RG1 8EW		
Model identifier:	Tapo L530E		
Type of light source			
Lighting technology used:	[HL ☐ /LFL T5 HF ☐ / LFL T5 HO ☐ /CFni ☐ /other FL ☐ /HPS ☐ /MH ☐ /other HID ☐ /LED ☒ /OLED ☐ /mixed ☐ /other ☐	Non-directional or directional:	[NDLS ☒ /DLS ☐
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	[MLS ☒ /NMLS ☐	Connected light source (CLS):	[yes ☒ /no ☐
Colour-tuneable light source:	[yes ☒ /no ☐	Envelope:	[no ☒ /second ☐ /non-clear ☐
High luminance light source:	[yes ☐ /no ☒		
Anti-glare shield:	[yes ☐ /no ☒	Dimmable:	[Yes ☒ /only with specific dimmers ☐ /no ☐
Product parameters			
Parameter	Value	Parameter	Value
General product parameters			
Energy consumption in on-mode (kWh/1,000 h) rounded up to the nearest integer	8.7W	Energy efficiency class	[A ☐ /B ☐ /C ☐ /D ☐ /E ☐ /F ☒ /G <input]<sup="" type="checkbox"/> (d)

Useful luminous flux, indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		843lm in [sphere ☒ /wide cone ☐ /narrow cone ☐	Correlated colour temperature, rounded to the nearest 100K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set	2500K-6500K Range
On-mode power (W)		8.7W	Standby power, expressed in W and rounded to the second decimal point)	0.14W
Networked standby power (P for CLS, expressed in W and rounded to the second decimal point)		0.16W	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82 81.8~82
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	60mm	Spectral power distribution in the range 250 nm to 800 nm, at full-load	
	Width	60mm		
	Depth	115mm		
Claim of equivalent power (see paragraph [2(1) and (2)])		[Yes ☒ /- <input]<="" td="" type="checkbox"/> <td>If yes, equivalent power (W)</td> <td>60W</td>	If yes, equivalent power (W)	60W
			Chromaticity coordinates (x and y)	0.458,0.410

Parameters for directional light sources:			
Peak luminous intensity (cd)	X	Beam angle in degrees, or the range of beam angles that can be set	[X/X...X]

<u>Parameters for LED and OLED light sources:</u>			
R9 Colour rendering index	10	Survival factor	1
The lumen maintenance factor	0.92		
<u>Parameters for LED and OLED mains light sources:</u>			
Displacement factor (cos ϕ_1)	0.55	Colour consistency in McAdam ellipses	2.2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage (see paragraph [2(3)]).	[Yes ☐ / - ☒] ^(d)	If yes then replacement claim (W)	60W
Flicker metric (Pst LM)	0.201	Stroboscopic effect metric (SVM)	0.028