# DELL Station d’accueil Performance Dock WD19DCS

**Marque :** DELL

**Code produit:** DELL-WD19DCS

**Nom du produit :** Station d’accueil Dell Performance Dock WD19DCS

USB 3.1 Gen2 Type-C, 3 x USB A 3.1, 2 x DisplayPort, HDMI, RJ-45, 240W

DELL Station d’accueil Performance Dock WD19DCS:

Avec sa conception prête pour l’avenir, la première et la plus puissante station d’accueil double USB-C modulaire boostera l’alimentation de votre PC jusqu’à 240 W.
DELL Station d’accueil Performance Dock WD19DCS. Technologie de connectivité: Avec fil, Interface de l'hôte: USB 3.2 Gen 2 (3.1 Gen 2) Type-C. LAN Ethernet : taux de transfert des données: 10,100,1000 Mbit/s. Couleur du produit: Noir, Résolution (numérique maximum): 5120 x 2880 pixels. Type de source d'alimentation: CC, Tension d'entrée AC: 120 - 230 V, Fréquence d'entrée AC: 50 - 60 Hz. Prise en charge du système d'exploitation Windows: Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10...

| Ports & interfaces | |
|---|---|
| Connectivity technology * | Wired |
| Host interface * | USB 3.2 Gen 2 (3.1 Gen 2) Type-C |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity * | 3 |
| PowerShare | ✔ |
| HDMI ports quantity * | 1 |
| HDMI version | 2.0 |
| DisplayPorts quantity | 2 |
| DisplayPort version | 1.4 |
| Microphone in * | ✘ |
| DC-in jack | ✔ |

| Network | |
|---|---|
| Ethernet LAN * | ✔ |
| Ethernet LAN (RJ-45) ports | 1 |
| Ethernet LAN data rates | 10,100,1000 Mbit/s |

| Performance | |
|---|---|
| Card reader integrated * | ✘ |
| Maximum digital resolution | 5120 x 2880 pixels |
| VESA mounting | ✔ |
| Product colour * | Black |
| On/off switch | ✔ |
| LED indicators | ✔ |

| Power | |
|---|---|
| Power source type | DC |
| AC input voltage | 120 - 230 V |
| AC input frequency | 50 - 60 Hz |
| Power supply | 240 W |

| Software | |
|---|---|
| Linux operating systems supported | ✔ |

| Operational conditions | |
|---|---|
| Operating temperature (T-T) | 0 - 35 °C |
| Storage temperature (T-T) | -20 - 60 °C |
| Operating relative humidity (H-H) | 10 - 80% |
| Storage relative humidity (H-H) | 5 - 90% |

| Weight & dimensions | |
|---|---|
| Width | 205 mm |
| Depth | 90 mm |
| Height | 29 mm |
| Weight | 585 g |

| Packaging data | |
|---|---|
| Quantity per pack | 1 pc(s) |
| Package width | 300 mm |
| Package depth | 315 mm |
| Package height | 62 mm |

| Carbon footprint | |
|---|---|
| Total carbon footprint (kg of CO2e) | 41 |
| Carbon emissions, manufacturing (kg of CO2e) | 30 |
| Carbon emissions, logistics (kg of CO2e) | 8 |
| Carbon emissions, energy usage (kg of CO2e) | 6 |
| Carbon emissions, end-of-life (kg of CO2e) | -3 |
| Total carbon emissions, w/o use phase (kg of CO2e) | 35 |

| Power | |
|---|---|
| Power cable length | 0.8 m |

| Software | |
|---|---|
| Windows operating systems supported | Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64 |

| Logistics data | |
|---|---|
| Harmonized System (HS) code | 84733020 |

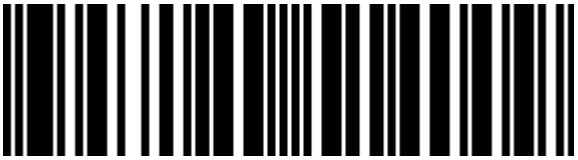

5397184514009

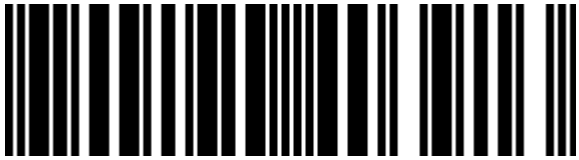

5704174403913

8592978333447



Publication date: 01-FEB-2025. Prints or copies of Information are only valid on the printed Publication date