# iiyama LH5041UHS-B2AG Signage Display Écran plat de signalisation numérique 127 cm (50") LCD 500 cd/m² 4K Ultra HD Noir 24/7

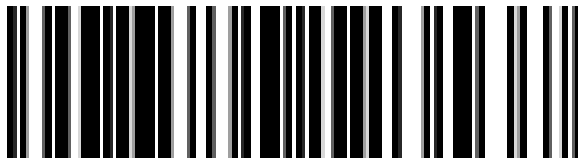**Marque :** iiyama

Nom du produit : LH5041UHS-B2AG

Code produit: LH5041UHS-B2AG

iiyama LH5041UHS-B2AG. Design Produit: Écran plat de signalisation numérique. Taille de l'écran: 127 cm (50"), Technologie d'affichage: LCD, Résolution de l'écran: 3840 x 2160 pixels, Luminosité de l'écran: 500 cd/m², Type HD: 4K Ultra HD. Operating hours (hours/days): 24/7. Couleur du produit: Noir

Display

Panel type	VA
Display diagonal *	127 cm (50")
Display technology *	LCD
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✗
Native aspect ratio	16:9
Response time	9.5 ms
Contrast ratio (typical)	5000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.285 x 0.285 mm
Active display area (W x H)	1096 x 616.4 mm
Display diagonal (metric)	125.7 cm
Horizontal scan range	30 - 80 kHz
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	3
DVI port *	✗
VGA (D-Sub) input ports	1
USB port *	✔
USB ports quantity	1
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Wi-Fi *	✗
Audio (L/R) in	1

Design

Bezel width (side)	1.39 cm
Bezel width (top)	1.39 cm
Bezel colour	black, glossy

Performance

Purpose *	Commercial
On Screen Display (OSD) languages	German, English, Spanish, French, Italian, Japanese, Russian
Operating hours (hours/days)	24/7
HDCP	✔
HDCP version	2.2
Mean time between failures (MTBF)	50000 h

Power

Power consumption (typical) *	115 W
Power consumption (standby) *	0.5 W
Power consumption (off)	0.3 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	115 kWh
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Energy efficiency scale	A to G

Computer system

Computer system *	✗
Built-in processor *	✗

Weight & dimensions

Width (with stand)	1122.5 mm
Depth (with stand)	55 mm
Height (with stand)	643.5 mm
Weight (with stand)	11.1 kg

Ports & interfaces

RS-232 interface	✔
RS-232C	✔
Remote (IR) input	1

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	400 x 400 mm
Bezel width (bottom)	1.49 cm

Packaging data

Package width	1261 mm
Package depth	132 mm
Package height	761 mm

Packaging content

Cables included	HDMI, Power, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	-20 - 60%

Certificates

Certification	CE, TÜV-Bauart, RoHS support, ErP, WEEE, REACH, UKCA

4948570123537