



APC Back- UPS Stand-by (Offline) 0,65 kVA 400 W 4 AC-uitgang(en)

Merk : APC

Artikelcode: BK650EI

Productnaam : APC Back-UPS BK650EI - 650VA, 4x C13 output, USB

- Spanningsbeveiliging
- Geluidsalarm(en)
- USB-poort
- Automatische batterij test
- LED-indicatoren
- Filtratie


APC Back-UPS BK650EI - 650VA, 4x C13 output, USB

APC Back-UPS. UPS-topologie: Stand-by (Offline), Output power capacity (VA): 0,65 kVA, Uitgangsvermogen: 400 W. Stopcontacttypes: C13 stekker, IEC 60320, Stekker: C14 stekker, Aantal AC uitgangen: 4 AC-uitgang(en). Energie-opslagtechnologie accu/batterij: Sealed Lead Acid (VRLA), Batterij capaciteit: 9 Ah, Batterij capaciteit: 111 VAh. Vormfactor: Tower, Kleur van het product: Beige, Lengte snoer: 1,8 m. Certificaten van naleving: RoHS, Certificering: A-tick, C-tick, CE, GOST, NEMKO



Features		Design	
UPS topology *	Standby (Offline)	Cable length	1.8 m
Output power capacity *	0.65 kVA	Product colour *	Beige
Output power *	400 W	LED indicators	✓
Waveform *	Sine	Operational conditions	
Input operation voltage (min) *	160 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	286 V	Storage temperature (T-T)	-15 - 45 °C
Input frequency *	50/60 Hz	Operating relative humidity (H-H)	5 - 95%
Output frequency regulation	47 - 63 Hz	Storage relative humidity (H-H)	5 - 95%
Maximum current	7 A	Operating altitude	0 - 3048 m
Surge energy rating	310 J	Non-operating altitude	0 - 15240 m
Hold time (min)	6 ms	Certificates	
Hold time (max)	10 ms	Compliance certificates	RoHS
Efficiency	98.9%	Certification	A-tick, C-tick, CE, GOST, NEMKO
Noise level	45 dB	Packaging content	
Surge protection	✓	Cables included	USB cable
Surge protection features	Digital Subscriber Line (DSL), Fax, Modem, Telephone	Quick installation guide	✓
Audible alarm(s)	✓	Sustainability	
Audible alarm modes	Low battery alarm, Overload alarm	Sustainability certificates	ENERGY STAR, Green Premium
Ports & interfaces		Weight & dimensions	
AC outlet types	C13 coupler, IEC 60320	Width	91 mm
Power plug	C14 coupler	Depth	284 mm
AC outlets quantity	4 AC outlet(s)		
Number of output IEC jumpers	2		

Ports & interfaces		Weight & dimensions	
USB port	✓	Height	165 mm
Battery		Weight	6.03 kg
Battery technology	Sealed Lead Acid (VRLA)	Packaging data	
Battery capacity	9 Ah	Software CD	✓
Battery capacity	111 VAh	Bundled software	PowerChute Personal Edition
Battery voltage	12 V	Package width	185 mm
Typical backup time at full load	4.7 min	Package depth	415 mm
Typical backup time at half load	14.7 min	Package height	494 mm
Battery life (max)	6 year(s)	Package weight	7.31 kg
Battery recharge time	8 h	Logistics data	
Automatic battery test	✓	Products per pallet	48 pc(s)
Replacement battery cartridge	1	Harmonized System (HS) code	85078000
Design		Products per master (outer) case	1 pc(s)
Form factor *	Tower	Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Filtering	✓
		Packaging content	Detachable IEC C13 to IEC C14 power cords

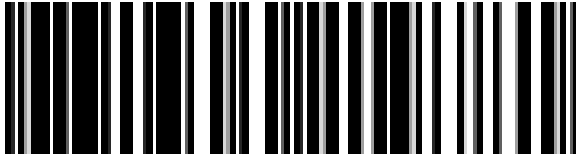

0731304219781



731304219781

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.