





Conceptronic ZEUS52ES3K UPS Dubbele conversie (online) 3 kVA 2700 W 4 AC-uitgang(en)

Merk : Conceptronic

Artikelcode: ZEUS52ES3K


Productnaam : ZEUS52ES3K

Conceptronic ZEUS52ES3K. UPS-topologie: Dubbele conversie (online), Output power capacity (VA): 3 kVA, Uitgangsvermogen: 2700 W. AC outlet types: Type F, Aantal AC uitgangen: 4 AC-uitgang(en), USB port type: USB Type-B. Batterij capaciteit: 9 Ah, Accu/Batterij voltage: 12 V, Accu/Batterij oplaadtijd: 4 uur. Form factor: Tower, Kleur van het product: Zwart, Type koeling: Actief. Compliance certificates: CE, RoHS



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery capacity	108 Wh
Output power capacity *	3 kVA	Design	
Output power *	2700 W	Form factor *	Tower
Waveform *	Sine	Cooling type	Active
Input operation voltage (min) *	220 V	Built-in fan	✓
Input operation voltage (max) *	240 V	Product colour *	Black
Input frequency *	50/60 Hz	Display type	LCD
Output operation voltage (min)	220 V	Operational conditions	
Output operation voltage (max)	240 V	Operating temperature (T-T)	0 - 40 °C
Maximum current	16 A	Operating relative humidity (H-H)	20 - 90%
Efficiency (ECO mode)	95%	Certificates	
Input power factor	0.99	Compliance certificates	CE, RoHS
Output power factor	0.9	Packaging content	
Crest factor	3:1	Cables included	Input power cable, RS-232, USB cable
ECO mode	✓	Quick installation guide	✓
Power protection features	Overload, Short circuit	Weight & dimensions	
Audible alarm(s)	✓	Width	196 mm
Audible alarm modes	Alarm when on battery, Fault, Overload alarm, Battery replacement, Low battery alarm	Depth	416 mm
		Height	342 mm
Ports & interfaces		Weight	21.3 kg
AC outlet types	Type F	Packaging data	
AC outlets quantity	4 AC outlet(s)	Package type	Box
USB port	✓	Logistics data	
USB 2.0 ports quantity	1	Pallet gross length	100 cm
USB port type	USB Type-B	Pallet gross width	120 cm
RS-232 ports	1	Pallet gross height	126 cm
Emergency Power Off (EPO) connector	✓	Harmonized System (HS) code	8504406090
Battery		Master (outer) case width	295 mm
Battery capacity	9 Ah	Master (outer) case length	519 mm
Battery voltage	12 V	Master (outer) case height	458 mm
Battery recharge time	4 h		

Battery		Logistics data	
Cold start	✓	Master (outer) case gross weight	22.3 kg
		Products per master (outer) case	1 pc(s)
		Country of origin	China

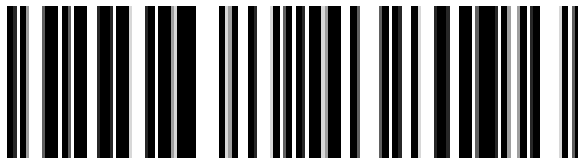

4015867238196

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 07-FEB-2025. Prints or copies of Information are only valid on the printed Publication date